


T-Max[®] P, insert for turning

C-style insert (Rhombic 80°)

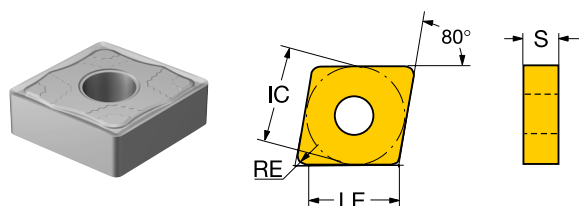

Metric (mm)

		S							
		1210	SSC	LE	S	RE	IC	D1	
Ordering code				[mm]	[mm]	[mm]	[mm]	[mm]	
Medium	CNMG 12 04 04-SMC	●	12	12.5	4.76	0.4	12.70	5.16	
	CNMG 12 04 08-SMC	●	12	12.1	4.76	0.8	12.70	5.16	
	CNMG 12 04 12-SMC	●	12	11.7	4.76	1.2	12.70	5.16	
	CNMG 16 06 08-SMC	●	16	15.3	6.35	0.8	15.88	6.35	
	CNMG 16 06 12-SMC	●	16	14.9	6.35	1.2	15.88	6.35	

● = First choice ○ = Good choice

Imperial (inch)

		S							
		1210	SSC	LE	S	RE	IC	D1	
Ordering code ANSI				[inch]	[inch]	[inch]	[inch]	[inch]	
Medium	CNMG 431-SMC	●	1/2	0.492	0.188	0.016	0.500	0.203	
	CNMG 432-SMC	●	1/2	0.476	0.188	0.031	0.500	0.203	
	CNMG 433-SMC	●	1/2	0.460	0.188	0.047	0.500	0.203	
	CNMG 542-SMC	●	5/8	0.603	0.250	0.031	0.625	0.250	
	CNMG 543-SMC	●	5/8	0.587	0.250	0.047	0.625	0.250	

● = First choice ○ = Good choice